

細目型永磁電磁盤

FINE-POLE PERMANENT ELECTROMAGNETIC CHUCK

GLIW-N TYPE

極細目型永磁電磁盤

FINE-LINE PERMANENT ELECTROMAGNETIC CHUCK

GLIW-A-N TYPE

磁場強度 900 GAUSS 以上

Magnetic field intensity: Higher than 900 GAUSS

用途：

- 適用於磨床作業等之輕切削及長時間吸磁之加工。

特點：



- 吸磁1.5秒，逆磁1.5秒，增加工作效率。
- 不因瞬間停電而喪失吸力導致工件損壞及傷害工作人員，安全性增加。
- 因無電力負載，吸磁後立即斷電，可長時間保持吸力，所以省電。不發熱，沒有內部溫升，不易變形所以精度高，也不用常常修整磁盤面，增加磁盤壽命。
- 面板係由多道防水處理，增加面板強度，及防水性。
- 對薄型及小型工件排列成面之相互吸引著有良好之效果，吸著力較大。
- ※GLIW-N系列-針對永電磁盤加工後不易取下工件的問題，可有效改善。
(相關規格表請參照GLIW TYPE)

APPLICATION：

- Suitable for light milling and grinding machines.

FEATURES:

- Specially designed for smaller and thinner workpiece, with super power magnetism.
- Saves electricity, magnetizes 1.5 seconds and demagnetizes 1.5 seconds, lasts long-run magnetism for operation.
- No deformation, high-accuracy performance .
- Enforce face plate and main body intensity and multi-water-proof.
- ※GLIW-N GLIW-A N TYPE The permanent electromagnetic chuck is aimed at improving the situation that the workpiece is not easy to demagnetize after machining.

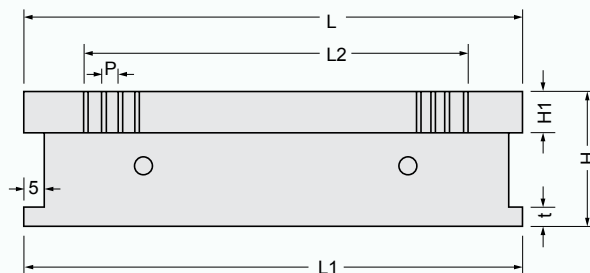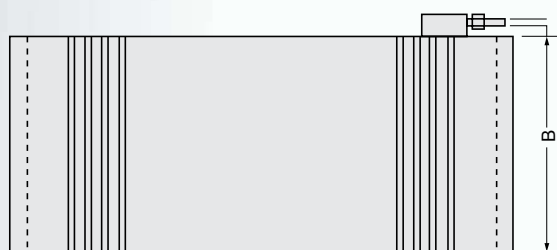

單位：mm

型號 Model	尺寸 Dimension	磁盤面 Face Plate				磁極間距 Pole Pitch P	安置面 Bottom Plate			電壓 Voltage (DC)	高度 Height (H)	重量 Weight (KG)
		B	L	L2	H		B	L1	t			
GLIW-612N	150X300	150	300	240	25	FOR GLIW =4(1+3) FOR GLIW-A =2(1+1)	150	300	18	160 V	88	30
GLIW-816N	200X400	200	400	340			200	400				53
GLIW-818N	200X450	200	450	400			200	450				60
GLIW-820N	200X500	200	500	440			200	500				67
GLIW-1020N	250X500	250	500	440			250	500				83
GLIW-1224N	300X600	300	600	540			300	600				120
GLIW-1628N	400X700	400	700	640			400	700				186
GLIW-1632N	400X800	400	800	740			400	800				213
GLIW-2040N	500X1000	500	1000	940			500	1000			95	350

* 型錄上產品規格尺寸僅供參考，以本公司實際產品主為準，變更時恕不另行通知。

The specifications and dimensions of products in the catalogs are for reference only. Subject to be changed without any notice.